



## Technical data

### DLG 314 AD


Unsplit housings ZLOE, ZLG

Three bearing housing, made of grey cast, for grease lubrication

#### KIT CONTENT

NU 314 EG15 C3, NU 314 EG15 C3 + 6314 C3, V-80S, FI 18

#### VISUAL (S)

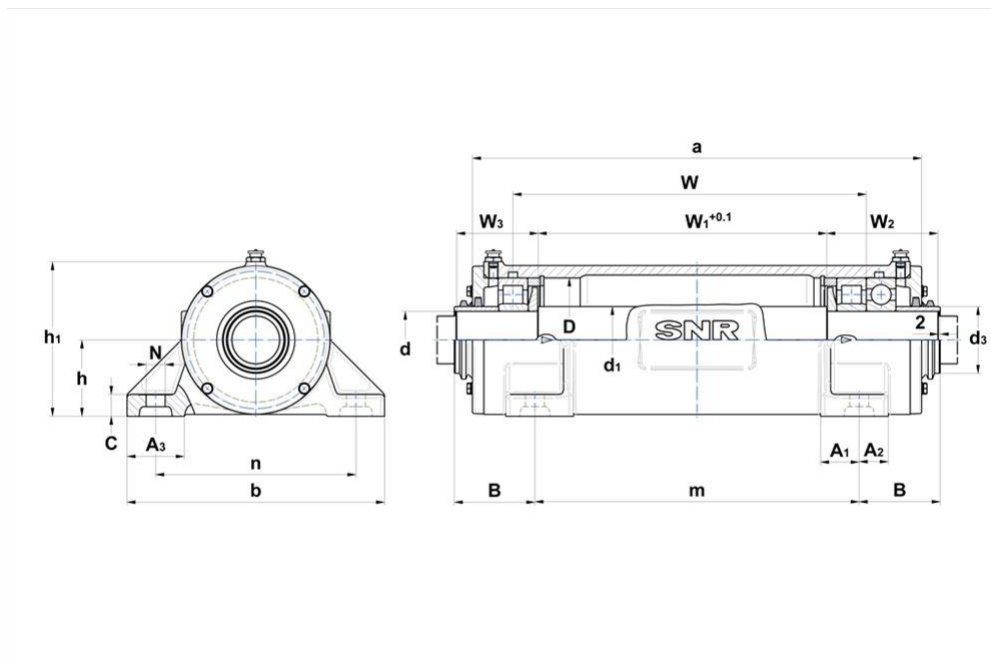

#### PRODUCT DEFINITION

|                                             |        |
|---------------------------------------------|--------|
| <b>Brand</b>                                | SNR    |
| <b>d - Shaft diameter</b>                   | 70 mm  |
| <b>d1 - Shaft diameter between bearings</b> | 80 mm  |
| <b>d3 - Outer diameter sleeve</b>           | 80 mm  |
| <b>a - Housing length</b>                   | 517 mm |
| <b>b - Housing foot width</b>               | 290 mm |



**NTN Europe**

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00  
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072  
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

| PRODUCT DEFINITION                                 |           |
|----------------------------------------------------|-----------|
| <b>c - Housing foot height</b>                     | 25 mm     |
| <b>h - Bearing center height</b>                   | 95 mm     |
| <b>h1 - Housing height</b>                         | 190 mm    |
| <b>m - Mounting hole/punches distance (length)</b> | 380 mm    |
| <b>n - Mounting hole distance (width)</b>          | 230 mm    |
| <b>N - Mounting hole diameter</b>                  | 20 mm     |
| <b>B - Distance mounting hole to shaft step</b>    | 83,5 mm   |
| <b>W - Bearing distance</b>                        | 408,5 mm  |
| <b>W1 - Central shaft length</b>                   | 334 mm    |
| <b>W2 - Right shaft end length</b>                 | 124 mm    |
| <b>W3 - Left shaft end length</b>                  | 89 mm     |
| <b>A1</b>                                          | 45 mm     |
| <b>A2</b>                                          | 35 mm     |
| <b>A3 - ZLG foot width</b>                         | 60 mm     |
| <b>D - Bearing seat diameter</b>                   | 150 mm    |
| <b>Mass</b>                                        | 37 kg     |
| <b>Material of Housing</b>                         | grey cast |

| BOLTS                                  |         |
|----------------------------------------|---------|
| <b>G - Fixing bolts</b>                | M16     |
| <b>Recommended torque fixing bolts</b> | 150 N-m |
| <b>Cover bolts</b>                     | M8x25   |
| <b>Recommended torque cover bolts</b>  | 17 N-m  |

