



Technical data

DLG 324 AF


Unsplit housings ZLOE, ZLG

Three bearing housing, made of grey cast, for grease lubrication

KIT CONTENT

6324 C3, 2x 7324 BG, ASG 6324, V-140S, FI 32

VISUAL (S)

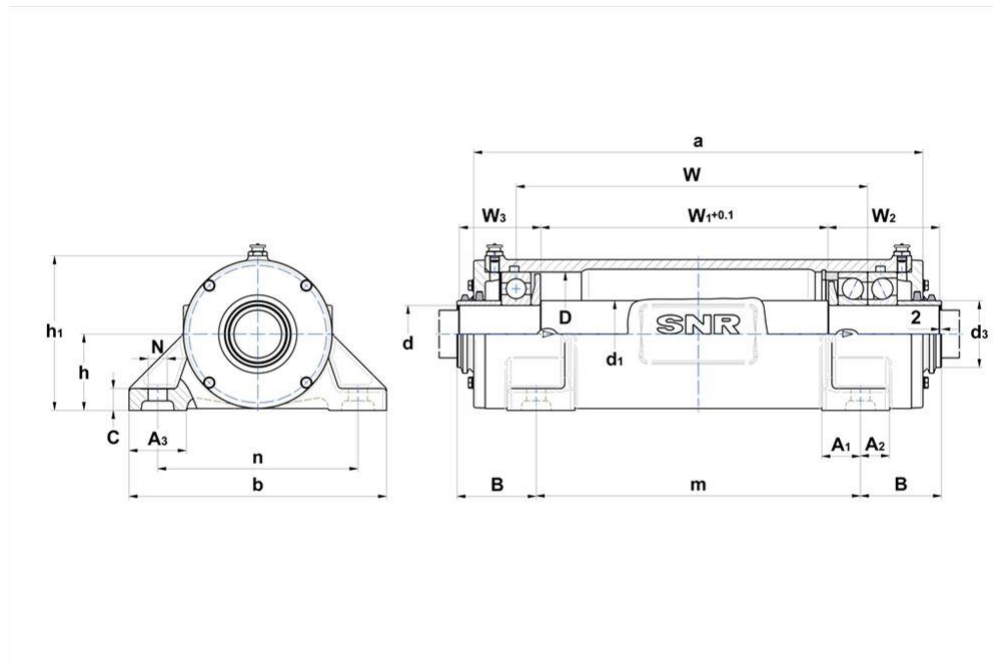

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	120 mm
d1 - Shaft diameter between bearings	140 mm
d3 - Outer diameter sleeve	140 mm
a - Housing length	705 mm
b - Housing foot width	500 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
 S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
 SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
c - Housing foot height	40 mm
h - Bearing center height	160 mm
h1 - Housing height	320 mm
m - Mounting hole/punches distance (length)	540 mm
n - Mounting hole distance (width)	410 mm
N - Mounting hole diameter	35 mm
B - Distance mounting hole to shaft step	100 mm
W - Bearing distance	572 mm
W1 - Central shaft length	466,5 mm
W2 - Right shaft end length	162,5 mm
W3 - Left shaft end length	110,5 mm
A1	78 mm
A2	60 mm
A3 - ZLG foot width	115 mm
D - Bearing seat diameter	260 mm
Mass	150 kg
Material of Housing	grey cast

BOLTS	
G - Fixing bolts	M30
Recommended torque fixing bolts	1005 N-m
Cover bolts	M10x30
Recommended torque cover bolts	35 N-m

