



Technical data

SNCD232


Split bearing housings SNC(D)

Split plummer block for bearings with cylindrical bore, made of ductile cast, for grease lubrication

KIT CONTENT

SNCD232-532-

VISUAL (S)

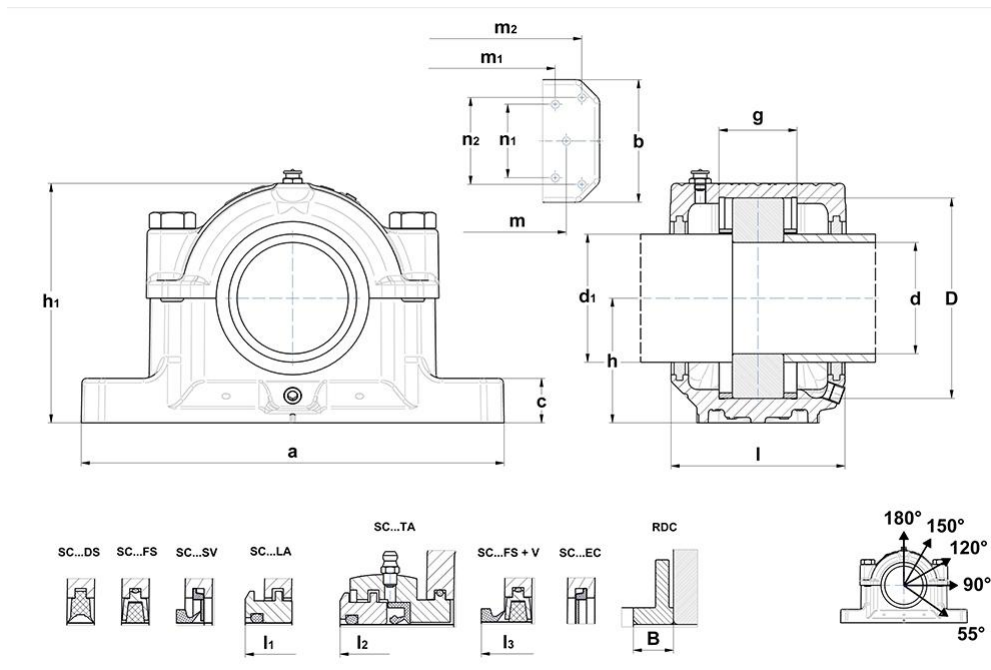

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	160 mm
d1 - Shaft diameter outlet large	175 mm
D1 - Fixation holes MH1	35 mm
D2 - Fixation holes MH2	26 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
a - Housing length	550 mm
b - Housing foot width	160 mm
c - Housing foot height	60 mm
g - Bearing seat width	114 mm
h - Bearing center height	170 mm
h1 - Housing height	344 mm
l - Housing mid width	235 mm
l1 - Width over TS	251 mm
l2 - Width over TA	317 mm
l3 - Width over V-ring	271
m - Mounting hole/punches distance (length)	470 mm
m1 - Distance punches (additional holes)	450 mm
n1 - Distance punches for additional holes (width)	100 mm
m2 - Distance punches (dowel pins)	506 mm
n2 - Distance punches for dowel pins (width)	116 mm
D - Bearing seat diameter	290 mm
B - Width RDC	40 mm
Initial grease quantity	3 l
Diameter dowel pins	8 mm
m3 - Distance blind hole bottom pins	372 mm

SEALINGS AND COVER	
Sealing DS	SC 232 DS
Sealing LA	SC 232 LA



SEALINGS AND COVER	
Sealing FS	SC 232 FSS
Sealing TA	SC 232 TA
Sealing SV	SC 232 SV
end cover EC	SC232-532EC
V-ring option	V180A

BREAKING LOADS	
Breaking loads P 0°	3060000000 mN
Breaking loads P 55°	2610000000 mN
Breaking loads P 90°	1548000000 mN
Breaking loads P 120°	1152000000 mN
Breaking loads P 150°	1026000000 mN
Breaking loads P 180°	1314000000 mN

ASSOCIATED COMPONENTS - GENERAL	
Regulation disc	RDC232

ASSOCIATED COMPONENTS - OPTION 1	
Bearing	22232
Fixing ring (x2)	FR290x17x6

ASSOCIATED COMPONENTS - OPTION 2	
Bearing	23232
Fixing ring (x2)	FR290x5x6

