



Technical data

SNCD526


Split bearing housings SNC(D)

Split plummer block for bearings on adapter sleeve, made of ductile cast, for grease lubrication

KIT CONTENT

SNCD226-526-

VISUAL (S)

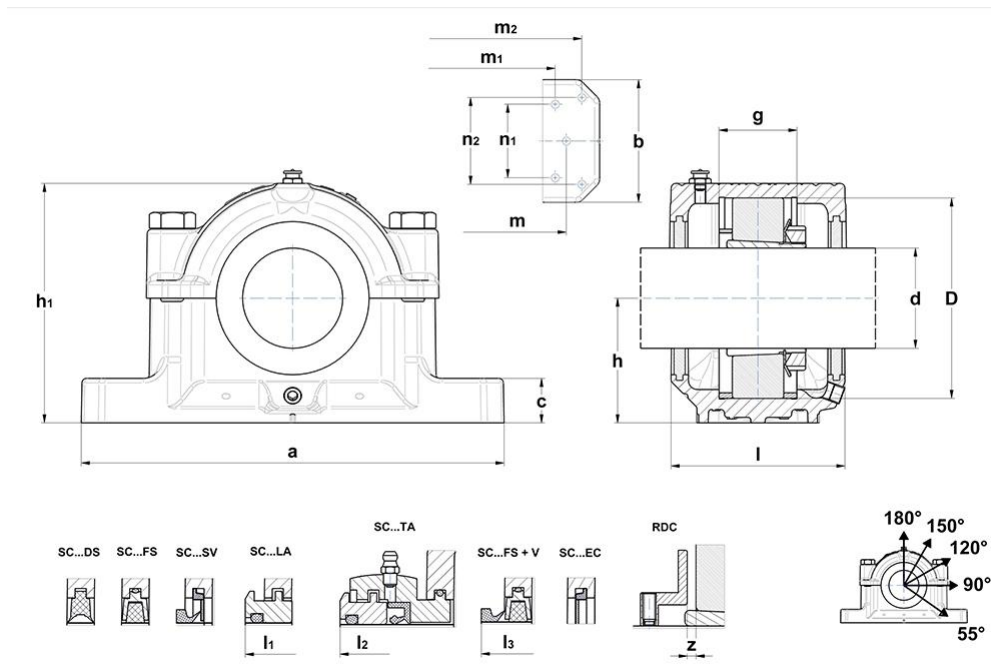

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	115 mm
D1 - Fixation holes MH1	28 mm
D2 - Fixation holes MH2	22 mm
a - Housing length	445 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
b - Housing foot width	130 mm
c - Housing foot height	50 mm
g - Bearing seat width	90 mm
h - Bearing center height	150 mm
h1 - Housing height	290 mm
l - Housing mid width	190 mm
l1 - Width over TS	207 mm
l2 - Width over TA	269 mm
l3 - Width over V-ring	221
m - Mounting hole/punches distance (length)	380 mm
m1 - Distance punches (additional holes)	370 mm
n1 - Distance punches for additional holes (width)	80 mm
m2 - Distance punches (dowel pins)	414 mm
n2 - Distance punches for dowel pins (width)	92 mm
D - Bearing seat diameter	230 mm
z - RDC/bearing distance	4 mm
Initial grease quantity	1,6 l
Diameter dowel pins	8 mm
m3 - Distance blind hole bottom pins	302 mm

SEALINGS AND COVER	
Sealing DS	SC 526 DS
Sealing LA	SC 526 LA
Sealing FS	SC 526 FSS



SEALINGS AND COVER	
Sealing TA	SC 526 TA
Sealing SV	SC 526 SV
end cover EC	SC226-526EC
V-ring option	V120A

BOLTS	
Connection bolts	M24x130
Recommended torque connection bolts	500 N-m
Maximum loads 120°	360000000 mN
Maximum loads 150°	210000000 mN
Maximum loads 180°	180000000 mN

BREAKING LOADS	
Breaking loads P 0°	1908000000 mN
Breaking loads P 55°	1620000000 mN
Breaking loads P 90°	972000000 mN
Breaking loads P 120°	738000000 mN
Breaking loads P 150°	648000000 mN
Breaking loads P 180°	810000000 mN

ASSOCIATED COMPONENTS - GENERAL	
Regulation disc	RDC526

ASSOCIATED COMPONENTS - OPTION 1	
Bearing	22226K
Adapter sleeve	H 3126
Fixing ring (x2)	FR230x13x6



ASSOCIATED COMPONENTS - OPTION 2	
Bearing	23226K
Adapter sleeve	H 2326
Fixing ring (x2)	FR230x5x6

