




Technical data

SNOE240-2DCBL

Oil lubricated housings SNOE

Split plummer block housing for spherical roller bearings with cylindrical bore, made of ductile cast, for oil lubrication

VISUAL (S)

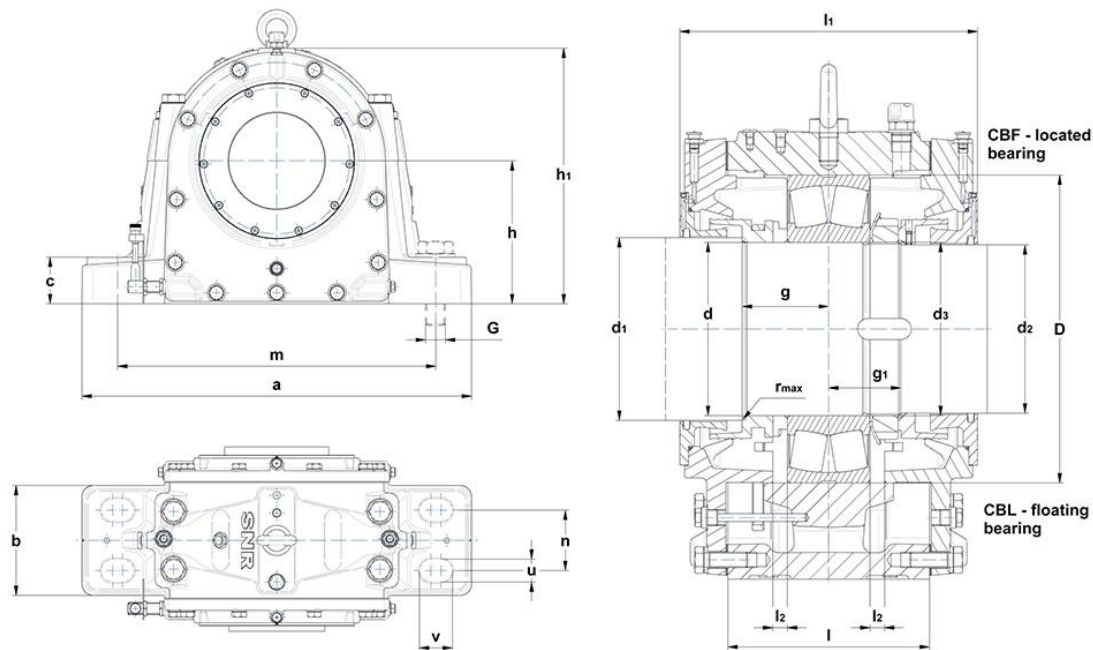

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	200 mm
d1 - Shaft diameter outlet large	210 mm
d2 - Shaft diameter outlet small	195 mm
d3 - Thread on shaft	M200x3
a - Housing length	830 mm
b - Housing foot width	240 mm
c - Housing foot height	90 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION

g - Distance large shaft shoulder to bearing center	99 mm
g1 - Distance small shaft shoulder to bearing center	82 mm
h - Bearing center height	280 mm
h1 - Housing height	510 mm
l - Housing mid width	260 mm
l1 - Housing width over covers	356 mm
l2 - Floating bearing displacement (x2)	17 mm
m - Mounting hole/punches distance (length)	670 mm
n - Mounting hole distance (width)	130 mm
u - Mounting hole (width)	48 mm
v - Mounting hole (length)	70 mm
r - Max shaft shoulder radius	2,5 mm
D - Bearing seat diameter	360 mm
Oil level	75-100 mm
Oil quantity	6,3 l
Mass	317 kg
Material of Housing	ductile cast

ASSOCIATED COMPONENTS - GENERAL

Bearing	22240
Nut	KM 40
Lock washer	MB 40

ASSOCIATED COMPONENTS - OPTION

Feltstrips (optional)	11x14x818
------------------------------	-----------



BOLTS	
G - Fixing bolts	M42
Recommended torque	2040 N-m
Connection bolts	M30
Recommended torque	870 N-m
Eye bolt(s)	M20

