




Technical data

SNOE248-2DCBL

Oil lubricated housings SNOE

Split plummer block housing for spherical roller bearings with cylindrical bore, made of ductile cast, for oil lubrication

VISUAL (S)

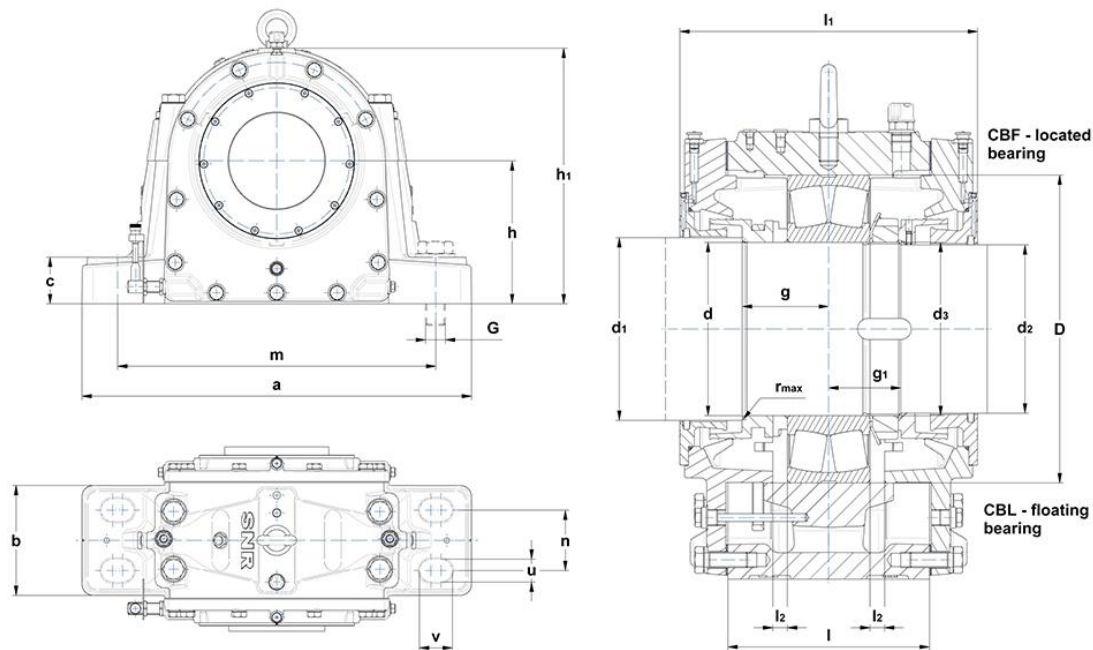

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	240 mm
d1 - Shaft diameter outlet large	260 mm
d2 - Shaft diameter outlet small	235 mm
d3 - Thread on shaft	TR240x4
a - Housing length	980 mm
b - Housing foot width	280 mm
c - Housing foot height	120 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
g - Distance large shaft shoulder to bearing center	120 mm
g1 - Distance small shaft shoulder to bearing center	100 mm
h - Bearing center height	340 mm
h1 - Housing height	615 mm
l - Housing mid width	300 mm
l1 - Housing width over covers	404 mm
l2 - Floating bearing displacement (x2)	16 mm
m - Mounting hole/punches distance (length)	820 mm
n - Mounting hole distance (width)	165 mm
u - Mounting hole (width)	48 mm
v - Mounting hole (length)	70 mm
r - Max shaft shoulder radius	4 mm
D - Bearing seat diameter	440 mm
Oil level	100-125 mm
Oil quantity	10 l
Mass	444 kg
Material of Housing	ductile cast

ASSOCIATED COMPONENTS - GENERAL	
Bearing	22248
Nut	HM 48 T
Lock washer	MB 48

ASSOCIATED COMPONENTS - OPTION	
Feltstrips (optional)	11x14x1012



BOLTS	
G - Fixing bolts	M42
Recommended torque	2040 N-m
Connection bolts	M36
Recommended torque	1520 N-m
Eye bolt(s)	M24

