



Brand of NTN Group


Technical data

SNOE314AF

Oil lubricated housings SNOE



VISUAL (S)

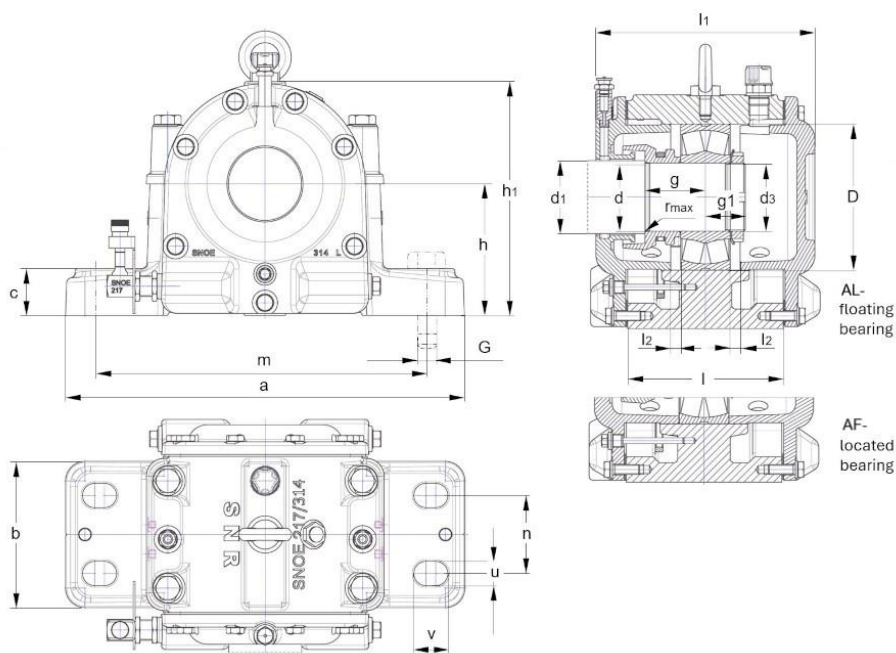

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	70 mm
d1 - Shaft diameter outlet large	75 mm
d2 - Shaft diameter outlet small	67 mm
d3 - Thread on shaft	M70x2
a - Housing length	410 mm
b - Housing foot width	150 mm
c - Housing foot height	48 mm
g - Distance large shaft shoulder to bearing center	62 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION

g1 - Distance small shaft shoulder to bearing center	41 mm
h - Bearing center height	135 mm
h1 - Housing height	240 mm
l - Housing mid width	160 mm
l1 - Housing width over covers	225 mm
l2 - Floating bearing displacement (x2)	0 mm
m - Mounting hole/punches distance (length)	340 mm
n - Mounting hole distance (width)	80 mm
u - Mounting hole (width)	25 mm
v - Mounting hole (length)	35 mm
r - Max shaft shoulder radius	1 mm
D - Bearing seat diameter	150 mm
Oil level	50-65 mm
Oil quantity	1,4 l
Mass	45 kg
Material of Housing	grey cast

ASSOCIATED COMPONENTS - GENERAL

Bearing	22314
Nut	KM 14
Lock washer	MB 14

ASSOCIATED COMPONENTS - OPTION

Feltstrips (optional)	9x7,5x350
------------------------------	-----------

BOLTS



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

BOLTS	
G - Fixing bolts	M20
Recommended torque	260 N-m
Connection bolts	M16
Recommended torque	130 N-m
Eye bolt(s)	M12

