



Technical data

ZLG 309 AB


Unsplit housings ZLOE, ZLG

Two bearing housing, made of grey cast, for grease lubrication

KIT CONTENT

6309C3, NU309EG15C3, V-55S, FI 12

VISUAL (S)

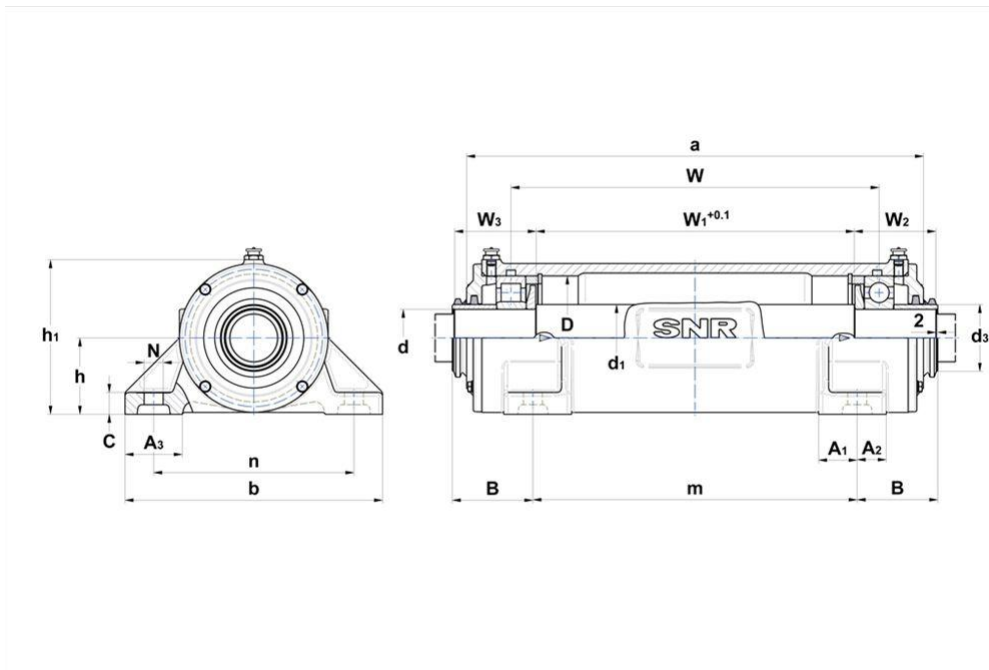

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	45 mm
d1 - Shaft diameter between bearings	55 mm
d3 - Outer diameter sleeve	55 mm
a - Housing length	370 mm
b - Housing foot width	210 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
c - Housing foot height	20 mm
h - Bearing center height	70 mm
h1 - Housing height	139 mm
m - Mounting hole/punches distance (length)	250 mm
n - Mounting hole distance (width)	170 mm
N - Mounting hole diameter	15 mm
B - Distance mounting hole to shaft step	72,5 mm
W - Bearing distance	282,5 mm
W1 - Central shaft length	237,5 mm
W2 - Right shaft end length	78,5 mm
A1	36 mm
A2	26 mm
A3 - ZLG foot width	45 mm
D - Bearing seat diameter	100 mm
Mass	16 kg
Material of Housing	grey cast
Initial grease quantity	0,133 l

ASSOCIATED COMPONENTS - OPTION	
O-ring (optional)	100x4

BOLTS	
G - Fixing bolts	M12
Recommended torque fixing bolts	65 N-m
Cover bolts	M6x25



BOLTS	
Recommended torque cover bolts	7 N-m