



Technical data

ZLG 312 AB


Unsplit housings ZLOE, ZLG

Two bearing housing, made of grey cast, for grease lubrication

KIT CONTENT

6312C3, NU 312 EG15 C3, V-70S, FI 16

VISUAL (S)

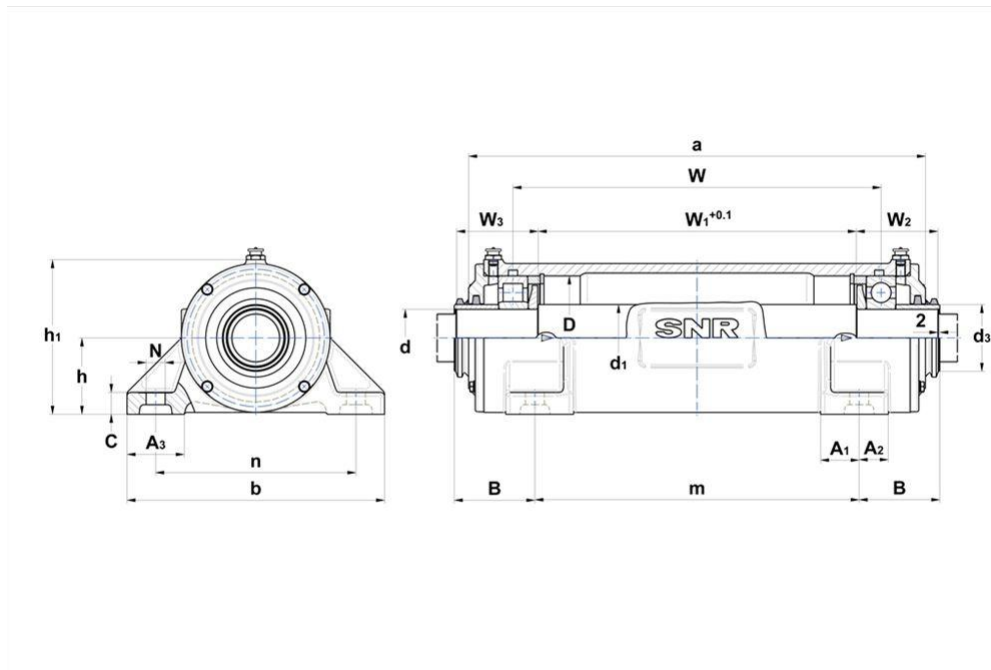

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	60 mm
d1 - Shaft diameter between bearings	70 mm
d3 - Outer diameter sleeve	70 mm
a - Housing length	479 mm
b - Housing foot width	270 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
c - Housing foot height	23 mm
h - Bearing center height	80 mm
h1 - Housing height	162 mm
m - Mounting hole/punches distance (length)	340 mm
n - Mounting hole distance (width)	210 mm
N - Mounting hole diameter	20 mm
B - Distance mounting hole to shaft step	85 mm
W - Bearing distance	385,5 mm
W1 - Central shaft length	334,5 mm
W2 - Right shaft end length	87,5 mm
A1	40 mm
A2	30 mm
A3 - ZLG foot width	60 mm
D - Bearing seat diameter	130 mm
Mass	30 kg
Material of Housing	grey cast
Initial grease quantity	0,243 l

ASSOCIATED COMPONENTS - OPTION	
O-ring (optional)	130x7

BOLTS	
G - Fixing bolts	M16
Recommended torque fixing bolts	150 N-m
Cover bolts	M6x25

BOLTS	
Recommended torque cover bolts	7 N-m

