



Technical data

ZLG 315 AB


Unsplit housings ZLOE, ZLG

Two bearing housing, made of grey cast, for grease lubrication

KIT CONTENT

6315C3, NU 315 EG15 C3, V-90S, FI 20

VISUAL (S)

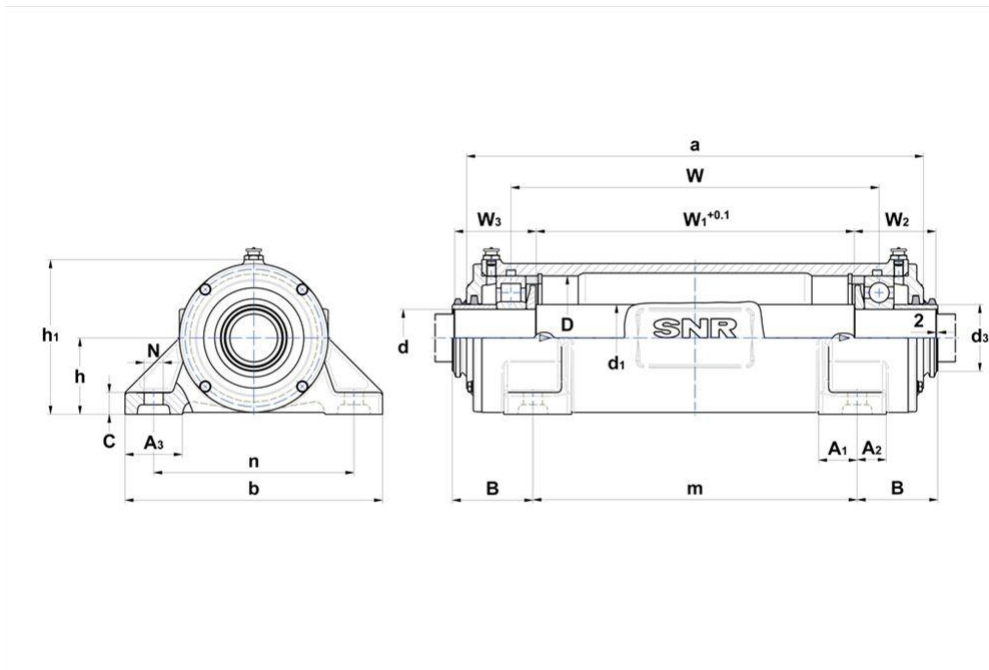

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	75 mm
d1 - Shaft diameter between bearings	90 mm
d3 - Outer diameter sleeve	85 mm
a - Housing length	559 mm
b - Housing foot width	330 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
 S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
 SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
c - Housing foot height	28 mm
h - Bearing center height	100 mm
h1 - Housing height	200 mm
m - Mounting hole/punches distance (length)	400 mm
n - Mounting hole distance (width)	260 mm
N - Mounting hole diameter	20 mm
B - Distance mounting hole to shaft step	95 mm
W - Bearing distance	452,5 mm
W1 - Central shaft length	391,5 mm
W2 - Right shaft end length	99 mm
A1	45 mm
A2	35 mm
A3 - ZLG foot width	70 mm
D - Bearing seat diameter	160 mm
Mass	47 kg
Material of Housing	grey cast
Initial grease quantity	0,429 l

ASSOCIATED COMPONENTS - OPTION	
O-ring (optional)	160x7

BOLTS	
G - Fixing bolts	M16
Recommended torque fixing bolts	150 N-m
Cover bolts	M8x25

BOLTS	
Recommended torque cover bolts	17 N-m

