



Technical data

ZLG 319 AC


Unsplit housings ZLOE, ZLG

Two bearing housing, made of grey cast, for grease lubrication

KIT CONTENT

6319C3, NJ 319 EG15 C3, V-95S, FI 21

VISUAL (S)

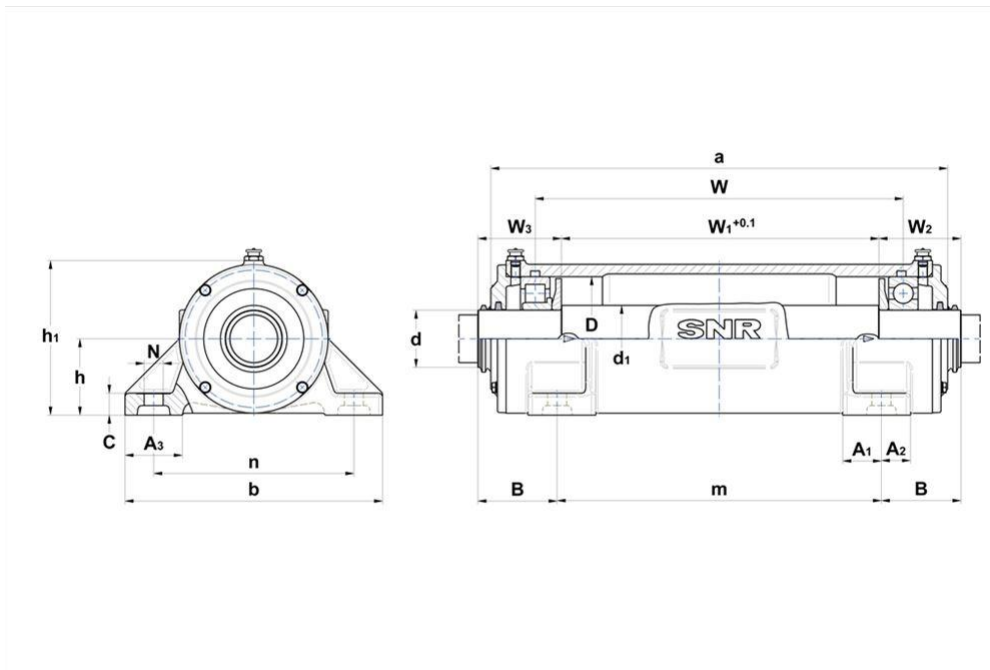

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	95 mm
d1 - Shaft diameter between bearings	110 mm
a - Housing length	633 mm
b - Housing foot width	400 mm
c - Housing foot height	35 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
 S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
 SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
h - Bearing center height	125 mm
h1 - Housing height	248 mm
m - Mounting hole/punches distance (length)	480 mm
n - Mounting hole distance (width)	320 mm
N - Mounting hole diameter	24 mm
B - Distance mounting hole to shaft step	92 mm
W - Bearing distance	511,5 mm
W1 - Central shaft length	442 mm
W2 - Right shaft end length	110,5 mm
A1	60 mm
A2	50 mm
A3 - ZLG foot width	90 mm
D - Bearing seat diameter	200 mm
Mass	82 kg
Material of Housing	grey cast
Initial grease quantity	0,734 l

ASSOCIATED COMPONENTS - OPTION	
O-ring (optional)	200x7

BOLTS	
G - Fixing bolts	M20
Recommended torque fixing bolts	290 N-m
Cover bolts	M8x25
Recommended torque cover bolts	17 N-m

