



Technical data

ZLOE 315/1 B


Unsplit housings ZLOE, ZLG

Two bearing housing, made of grey cast, for oil lubrication

KIT CONTENT

6315C3, NU 315 C3

VISUAL (S)

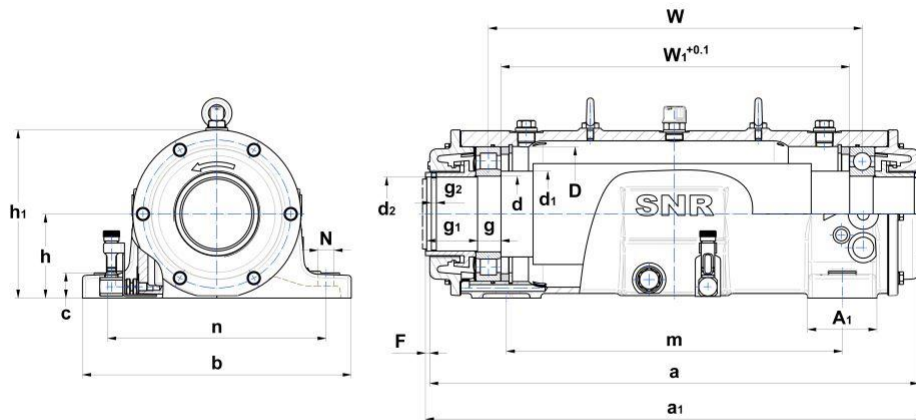

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	75 mm
d1 - Shaft diameter between bearings	90 mm
d2 - Shaft diameter outlet small	72 mm
a - Housing length	582,5 mm
a1 - Total length over lab	595 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
 S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
 SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION	
b - Housing foot width	320 mm
c - Housing foot height	30 mm
g - Shaft step 1 length	35 mm
g1 - Shaft step 2 length	49,5 mm
g2 - Shaft groove lab fixing	6 mm
h - Bearing center height	100 mm
h1 - Housing height	200 mm
m - Mounting hole/punches distance (length)	400 mm
n - Mounting hole distance (width)	260 mm
N - Mounting hole diameter	19 mm
F - Labyrinth overhang	5 mm
W - Bearing distance	445 mm
W1 - Central shaft length	408 mm
A1	80 mm
D - Bearing seat diameter	160 mm
Oil level	34,5 - 37,5 mm
Oil quantity	0,8 l
Mass	75 kg
Material of Housing	grey cast

BOLTS	
G - Fixing bolts	M16
Recommended torque fixing bolts	150 N-m
Cover bolts	M8x30



BOLTS	
Recommended torque cover bolts	17 N-m

