




Technical data

722511 DA
Flanged housings 722500

Flanged housing for bearings on adapter sleeve, made of grey cast, for grease lubrication

VISUAL (S)

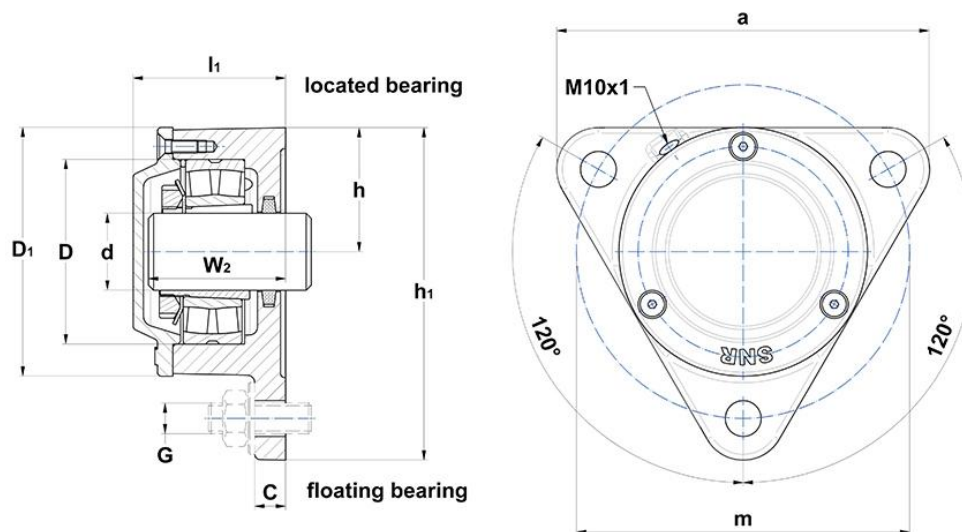

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	50 mm
D1 - Outer diameter cover	128 mm
a - Housing length	192 mm
c - Housing foot height	12 mm
h - Bearing center height	65 mm
h1 - Housing height	172 mm
l1 - Housing width over covers	75,5 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION

m - Mounting hole/punches distance (length)	170 mm
N - Mounting hole diameter	14 mm
D - Bearing seat diameter	100 mm
W2 - Base to shaft end distance	64 mm
Mass	4,1 kg
Material of Housing	grey cast

BOLTS

G - Fixing bolts	M12
Recommended torque fixing bolts	65 N-m
Cover bolts	M6x20
Recommended torque cover bolts	7 N-m

ASSOCIATED COMPONENTS - GENERAL

Feltstrip	FS 8 x 6,5 x 210
------------------	------------------

ASSOCIATED COMPONENTS - OPTION 1

Bearing	1211 K C3
Adapter sleeve	H211
Fixing ring (x1)	FR100x6x3

ASSOCIATED COMPONENTS - OPTION 2

Bearing	2211 K C3
Adapter sleeve	H311
Fixing ring (x1)	FE100x85x2

ASSOCIATED COMPONENTS - OPTION 3

Bearing	22211 K
----------------	---------



ASSOCIATED COMPONENTS - OPTION 3

Adapter sleeve	H311
Fixing ring (x1)	FE100x85x2

