


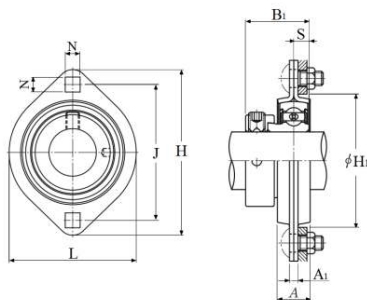

ITEM NUMBER

AELPFL204-012

Two Bolt Rhombus Flanged Unit, Pressed Steel Housing, Eccentric Locking Collar, AELPFL Type

Two Bolt Rhombus Flanged Unit, Pressed Steel Housing, Eccentric Locking Collar, AELPFL Type

d
19,050 mm
Bore

D
—
Outside diameter

B
—
Width

View details: <https://catson.vn/tra-cuu-vong-bi/ntn/aelpfl204-012/?lang=en>

Technical Specifications

Type	2-Bolt Flanged Unit
Bearing Type	Ball Bearing
Locking Device	Eccentric Locking Collar
Seal Type	Contact
Seal Material	Nitrile Rubber
Bearing Number	AEL204-012
Housing Number	PFL204
Housing Construction	2 Piece
End Type	Open
Performance	Light Duty
Dynamic Load Rating	12800 N
Static Load Rating	6650 N
Rotational Speed [Max]	6700 RPM
Weight	0.300 kg
Operating Temperature Range	-40 to 120 °C
Lubrication	Non-Relubricatable

Dimensional Specifications

d	19.050 mm
H	90.0 mm
L	67.0 mm
J	71.5 mm
A	16.0 mm
A1	4.0 mm
N	9.0 mm
B1	31.000 mm
S	7.500 mm
H1	56.0 mm

Specifications

Ball Material	Through Hardened
Bore Type	Cylindrical
Clearance	CN
Cage Material	Pressed Steel
Precision Rating	ISO Class 0
Radial Dynamic Load Rating	12800 N
Rotational Speed [Max]-Grease	6650.0 RPM
Outside Ring Width	25.400 mm
Inside Ring Width	25.400 mm
Radial Static Load Rating	6650 N

CONTACT

Email: infos@catson.com.vn

Website: www.catson.vn

Phone: +84 28 3820 8888

Fax: +84 28 3826 8888

