




Technical data

722516 A

Flanged housings 722500

Flanged housing for bearings on adapter sleeve, made of grey cast, for grease lubrication

VISUAL (S)

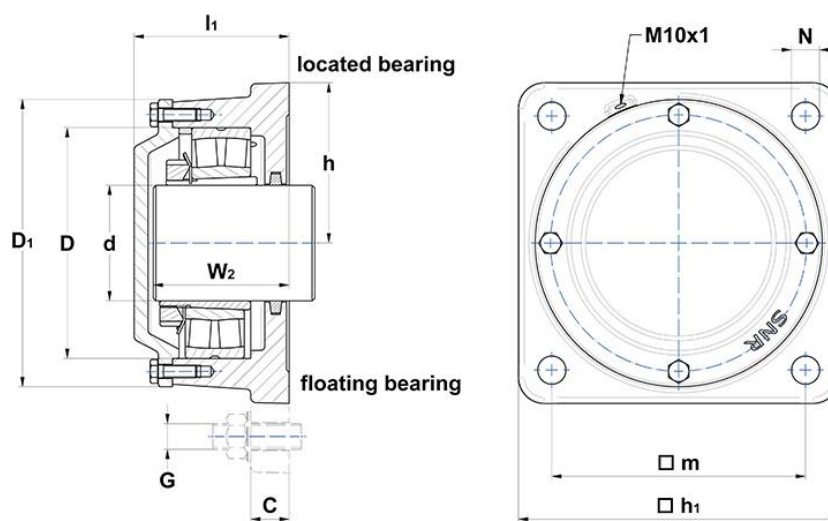

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	70 mm
D1 - Outer diameter cover	176 mm
a - Housing length	196 mm
c - Housing foot height	25 mm
h - Bearing center height	98 mm
l1 - Housing width over covers	110 mm
m - Mounting hole/punches distance (length)	152 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION

N - Mounting hole diameter	18 mm
D - Bearing seat diameter	140 mm
W2 - Base to shaft end distance	92 mm
Mass	9,8 kg
Material of Housing	grey cast

BOLTS

G - Fixing bolts	M16
Recommended torque fixing bolts	150 N-m
Cover bolts	M8x25
Recommended torque cover bolts	17 N-m

ASSOCIATED COMPONENTS - GENERAL

Feltstrip	FS 9 x 7,5 x 280
------------------	------------------

ASSOCIATED COMPONENTS - OPTION 1

Bearing	1216 K C3
Adapter sleeve	H216
Fixing ring (x2)	FR140x8,5x4

ASSOCIATED COMPONENTS - OPTION 2

Bearing	2216 K C3
Adapter sleeve	H316
Fixing ring (x1)	FR140x10x4

ASSOCIATED COMPONENTS - OPTION 3

Bearing	22216 K
Adapter sleeve	H316



ASSOCIATED COMPONENTS - OPTION 3

Fixing ring (x1)	FR140x10x4
------------------	------------

