




Technical data

722520 A

Flanged housings 722500

Flanged housing for bearings on adapter sleeve, made of grey cast, for grease lubrication

VISUAL (S)

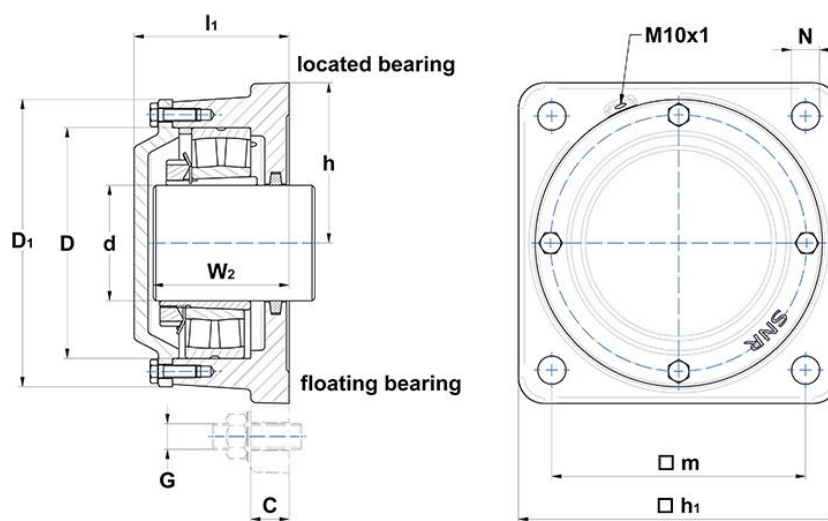

PRODUCT DEFINITION

Brand	SNR
d - Shaft diameter	90 mm
D1 - Outer diameter cover	224 mm
a - Housing length	250 mm
c - Housing foot height	30 mm
h - Bearing center height	125 mm
l1 - Housing width over covers	127 mm
m - Mounting hole/punches distance (length)	198 mm



NTN Europe

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

PRODUCT DEFINITION

N - Mounting hole diameter	22 mm
D - Bearing seat diameter	180 mm
W2 - Base to shaft end distance	107 mm
Mass	18 kg
Material of Housing	grey cast

BOLTS

G - Fixing bolts	M20
Recommended torque fixing bolts	290 N-m
Cover bolts	M10x30
Recommended torque cover bolts	35 N-m

ASSOCIATED COMPONENTS - GENERAL

Feltstrip	FS 10 x 8,5 x 350
------------------	-------------------

ASSOCIATED COMPONENTS - OPTION 1

Bearing	1220 K C3
Adapter sleeve	H220
Fixing ring (x1)	FR180x10x5+180x12x5

ASSOCIATED COMPONENTS - OPTION 2

Bearing	2220 K C3
Adapter sleeve	H320
Fixing ring (x1)	FR180x10x5

ASSOCIATED COMPONENTS - OPTION 3

Bearing	22220 K
Adapter sleeve	H320



ASSOCIATED COMPONENTS - OPTION 3

Fixing ring (x1)	FR180x10x5
------------------	------------

